



CR6210 Power Transducer

SINGLE PHASE, ACTIVE POWER, 0-5VDC OUTPUT

The **CR6200** Series, Power Transducers and Transmitters are designed to provide a controlled output that is proportional to the average power. These devices are specifically targeted to provide an efficient solution to most power sensing needs. Units are designed for operation in systems with sinusoidal voltage and current wave forms.



**CR6210, CR6211
CR6220, CR6221**



**CR6230, CR6231
CR6240, CR6241**



**CR6250, CR6251
CR6260, CR6261**

Regulatory Agencies

- Approved to UL3111-1, First Edition, Amendment 2
- Approved to CAN/CSA-C22.2, No. 1010.1-92
- Meets requirement of IEC 61010-1 and BS EN 61010-1

Applications

- Energy Management
- Motor Efficiency
- Multi-point power sensing
- Remote power sensing over long distances

Features


- 35mm DIN Rail or Panel Mount
- Ranges available for any power sensing need
- Active and Reactive power sensing
- 0 - 5 Vdc and 4 - 20 mAdc outputs
- Connection diagram printed on case

Where to Buy <http://WWW.JDGASTORE.COM>


- Pricing: pricing/6200.html
- Application Sheets: pdf/an6230-1.pdf,
pdf/an6250-1.pdf

Part Numbers


- CR6210** - - 1 Phase, Active Power with 0 - 5 Vdc Output
- CR6211** - - 1 Phase, Reactive Power with 0 - 5 Vdc Output
- CR6220** - - 1 Phase, Active Power with 4 - 20 mAdc Output
- CR6221** - - 1 Phase, Reactive Power with 4 - 20 mAdc Output
- CR6230** - - 3-Phase, 3-Wire, Active Power with 0 - 5 Vdc Output
- CR6231** - - 3-Phase, 3-Wire, Reactive Power with 0 - 5 Vdc Output
- CR6240** - - 3-Phase, 3-Wire, Active Power with 4 - 20 mAdc Output
- CR6241** - - 3-Phase, 3-Wire, Reactive Power with 4 - 20 mAdc Output
- CR6250** - - 3-Phase, 4-Wire, Active Power with 0 - 5 Vdc Output
- CR6251** - - 3-Phase, 4-Wire, Reactive Power with 0 - 5 Vdc Output
- CR6260** - - 3-Phase, 4-Wire, Active Power with 4 - 20 mAdc Output
- CR6261** - - 3-Phase, 4-Wire, Reactive Power with 4 - 20 mAdc Output

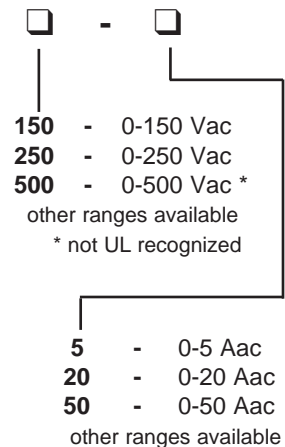

Connection Drawings

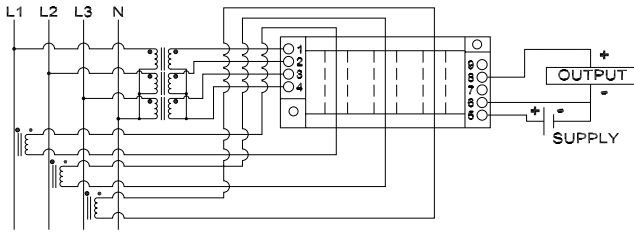


CR6250 CR6251
Three Phase - 4 Wire, 0 - 5 Vdc Output
shown with external voltage and
current transformers

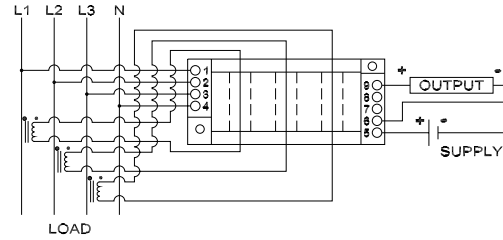

CR6260 CR6261
Three Phase - 4 Wire, 4 - 20 mAdc Output
shown with external current transformers

Typical Application

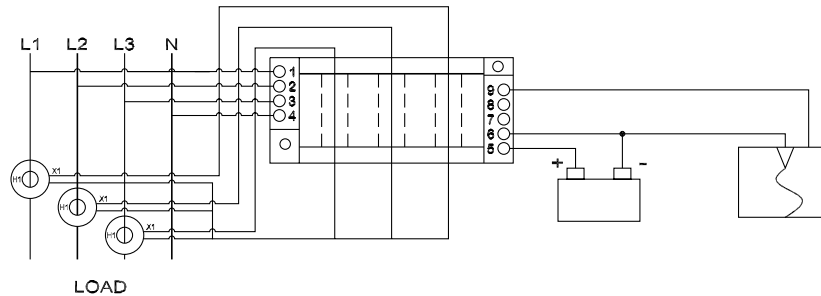

POWER TRANSDUCER

A university campus needs to monitor the power coming into each building and record the results at a central location. The incoming feeds are rated at 480/277, 2000 amps, 3-phase, 4-wire Y. An ANSI Metering Class Current Transformer, part number CR170RL-202, is selected from the CR Magnetics current transformer catalog to convert the full-load current down to 5 Amps for input to the transducer. The voltage legs are connected directly to the transducer.

Outline Drawing

